




LignumFusion

Herringbone

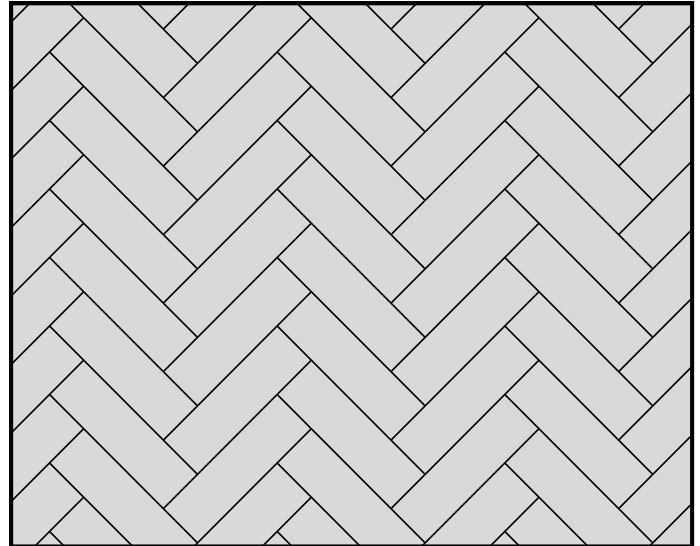

- Range:** 12V Herringbone Premium
- Class:** 23
- AC Rating:** AC4
- Surface:** Embossed in Register
- Construction:** Direct Pressure Laminate - HDF Core

PRODUCT SPECIFICATIONS	STANDARD	TEST VALUE
Dimensions	EN 13329	100mm x 600mm 32 planks/box = 1.92m ² 48 boxes/pallet = 92.16m ²
Total thickness	EN 13329	12,0mm
Classification	EN 13329	23: Heavy Domestic Use
Total weight	EN 13329	10,810 g/m ²
Abrasion Class	EN 13329	AC4
Locking System	-	UniClic
Bevelled Edges	-	Yes

PRODUCT PERFORMANCES	STANDARD	TEST VALUE
24 Hour Swelling	EN 622-5	< 17%
Bending Strength	EN 622-5	23 N/mm ²
Moisture Content	EN 622-1	4 - 11 %
Formaldehyde	EN 622-1	≤ 8 (Class E1)
Internal Bond	EN 622-5	1 N/mm ²
Impact Resistance	EN 13329	≥ IC 1
Stain Resistance	EN 438.2.15	Group 1&2: 5 Group 3: 4
Edge Swelling	EN 13329	≤ 18 %

Imported and distributed by Wood Innovations Ltd